

MV10G Series

10W, Wide 2:1 Input Range, 1.5KV Isolation, DIP1"x1" Package DC/DC Converters

Features

- ▶ Rated power: 10W Max
- ▶ Input voltage range 2:1
- ▶ Regulated single or dual out
- ▶ High efficiency up to 88%
- ▶ Isolation voltage 1.5KVDC
- ▶ Remote On/Off control
- ▶ Operating temperature range: -40 ~ +85°C ambient
- ▶ RoHS compliant
- ▶ Compact 1"x1" package
- ▶ Under voltage, over voltage, over current, and short circuit protection
- ▶ Meet IEC/EN/UL 62368-1 CISPR32, EN55032
- ▶ 3 year warranty



Overview

The MV10G series are 1.5KV isolated 10Watt DC/DC converters with standard DIP1"x1" footprint. Designed with high efficiency, they operate in a wide temperature range from -40°C to +85°C. Other features include wide 2:1 input voltage range, remote on/off control, under voltage, over voltage, over current, and short circuit protections. These converters are ideally suitable for battery operated equipment, measurement equipment, telecom, wireless network, industrial control system.

Model Numbers

Model Number	Input Voltage [VDC]			V _{OUT} [VDC]	Output Current [mA]		Efficiency [%] Typ.	Capacitive Load [uF] Max.
	Nom.	Range	*Max.		Max.	Min.		
MV10G-0505	5	4.5~9	12	5	2000	0	85	470
MV10G-0512	5	4.5~9	12	12	834	0	83	470
MV10G-0515	5	4.5~9	12	15	667	0	84	330
MV10G-0524	5	4.5~9	12	24	417	0	83	100
MV10G-0505D	5	4.5~9	12	±5	±1000	0	78	1000
MV10G-0512D	5	4.5~9	12	±12	±417	0	83	470
MV10G-0515D	5	4.5~9	12	±15	±334	0	84	330
MV10G-0524D	5	4.5~9	12	±24	±209	0	83	100
MV10G-1205	12	9~18	20	5	2000	0	83	470
MV10G-1212	12	9~18	20	12	834	0	87	470
MV10G-1215	12	9~18	20	15	667	0	88	330
MV10G-1224	12	9~18	20	24	417	0	88	100
MV10G-1205D	12	9~18	20	±5	±1000	0	83	1000
MV10G-1212D	12	9~18	20	±12	±417	0	86	470
MV10G-1215D	12	9~18	20	±15	±334	0	87	330
MV10G-1224D	12	9~18	20	±24	±209	0	87	100

MV10G Series

10W, Wide 2:1 Input Range, 1.5KV Isolation, DIP1“X1” Package DC/DC Converters

Model Numbers [continued]

Model Number	Input Voltage [VDC]			V _{OUT} [VDC]	Output Current [mA]		Efficiency [%] Typ.	Capacitive Load [uF] Max.
	Nom.	Range	*Max.		Max.	Min.		
MV10G-2403	24	18~36	40	3.3	2400	0	79	2200
MV10G-2405	24	18~36	40	5	2000	0	83	2200
MV10G-2412	24	18~36	40	12	834	0	87	470
MV10G-2415	24	18~36	40	15	667	0	88	330
MV10G-2424	24	18~36	40	24	417	0	88	100
MV10G-2405D	24	18~36	40	±5	±1000	0	83	1000
MV10G-2412D	24	18~36	40	±12	±417	0	87	470
MV10G-2415D	24	18~36	40	±15	±334	0	88	330
MV10G-2424D	24	18~36	40	±24	±209	0	88	100
MV10G-4803	48	36~75	80	3.3	2400	0	79	2200
MV10G-4805	48	36~75	80	5	2000	0	83	2200
MV10G-4812	48	36~75	80	12	834	0	87	470
MV10G-4815	48	36~75	80	15	667	0	88	330
MV10G-4824	48	36~75	80	24	417	0	88	100

* Only typical models are listed. Other models may be available upon request.

* Input voltage exceed the Max. value may cause permanent damage.

Electrical Specifications

Unless otherwise indicated, specifications are measured at $T_A=25^{\circ}\text{C}$, nominal input voltage, full load after warm up.

Parameters	Conditions	Min.	Typ.	Max.	Unit	Note
Input voltage surge 1 second max	$V_{IN, Nom} = 5V$	-0.7		16	VDC	
	$V_{IN, Nom} = 12V$	-0.7	-	25		
	$V_{IN, Nom} = 24V$	-0.7		50		
	$V_{IN, Nom} = 48V$	-0.7		100		
Startup input voltage	$V_{IN, Nom} = 5V$			4.5	VDC	
	$V_{IN, Nom} = 12V$			9.0		
	$V_{IN, Nom} = 24V$			18		
	$V_{IN, Nom} = 48V$			36		
Input under voltage shutdown	$V_{IN, Nom} = 5V$	3.0	3.5		VDC	
	$V_{IN, Nom} = 12V$	5.5	6.5	-		
	$V_{IN, Nom} = 24V$	12	15.5			
	$V_{IN, Nom} = 48V$	26	30			
Startup time			10		mS	
Remote On/Off control "Ctrl" pin open or logic high [ON] "Ctrl" pin grounded or logic low [OFF]	Logic high	2.7	-	9	VDC	Positive Logic
	Logic low	0	-	1.2	VDC	
	Ctrl pin current	-	6	10	mA	
Output voltage accuracy	$I_{OUT}=0$ to 100%	-	± 1	± 3	%	
Line regulation Full load, $V_{IN}=V_{IN, Min}$ to $V_{IN, Max}$	Main Out	-	± 0.2	± 0.5	%	
	Others		± 0.5	± 1.0		
Load regulation $I_{OUT}=5\%$ to 100% of $I_{OUT, rated}$	Main Out	-	± 0.5	± 1.0	%	
	Others		± 0.5	± 1.5		
Cross regulation $+I_{OUT}=50\%$, $-I_{OUT}=10\%$ to 100%	Dual output models	-	-	± 5	%	
Output ripple and noise 20MHz bandwidth, peak to peak		-	40	100	mVp-p	
Temperature coefficient	Full load	-	-	± 0.03	%/ $^{\circ}\text{C}$	
Dynamic load response $I_{OUT}=25\% \sim 50\% \sim 75\%$ of $I_{OUT, rated}$	Peak deviation**		± 3	± 7	% V_{OUT}	** $V_{OUT}=3.3, 5V$
	Peak deviation	-	± 3	± 5	% V_{OUT}	
	Recovery time		300	500	μS	
Output over voltage protection		110		160	% V_{OUT}	
Output over current protection		110	150	190	% I_{OUT}	
Output short circuit protection		Continuous, automatic recovery				
Input filter		PI filter				
Hot plug		None				

* Operating with less than 5% of rated load will not cause damage to the converters, but the performances data may not fall into the specifications, and stable operating is not assured.

General Specifications

Parameters	Conditions	Min.	Typ.	Max.	Unit	Note
Isolation voltage 1 minute, leakage current 1mA max.	I/P to O/P	1500	-	-	VDC	
Isolation resistance Tested at 500VDC	I/P to O/P	1000	-	-	M ohm	
Isolation capacitance 100KHz, 0.1V	I/P to O/P	-	1000	-	pF	
Switching frequency	Full load	-	300	-	KHz	PWM mode
Operating temperature		-40	-	+85	°C	
Storage temperature		-55	-	+125	°C	
Storage humidity	None condensing	5	-	95	%RH	
Pin soldering resistance 1.5mm away from case for 10 sec		-	-	+300	°C	
Cooling method		Free air convection				
Case material		Aluminum alloy				
Vibration		IEC/EN61373 – Category 1, Grade B				
MTBF	MIL-HDBK-217F	>1,000,000 Hours, T _A =25°C				
Design based on standards		UL/EN/IEC 62368-1				
Safety certifications		EN/IEC 62368-1				
EMC		CISPR32, EN55032 Class B with external circuit IEC/EN61000-4-2, 3, 4, 5, 6				
Size, and Weight		25.4 x 25.4 x 12mm, 15g				


* Switching frequency is measured at full load. The converter reduces the switching frequency at low load [less than 50% load] for better efficiency.

Characteristic Curves


Derating Curve

Output vs Ambient Temperature

$V_{IN} = 5V$

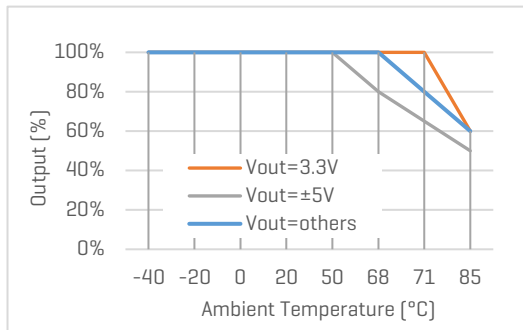


$V_{IN} = \text{Others}$

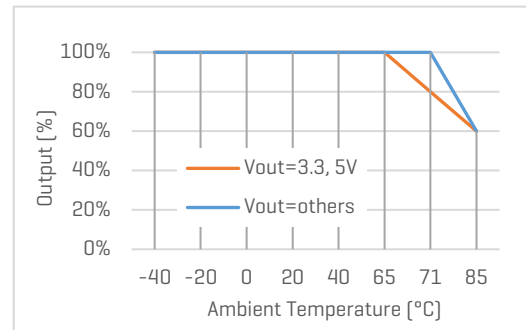

Efficiency Curve


Efficiency vs Input Voltage

MV10G-2405, with full Load

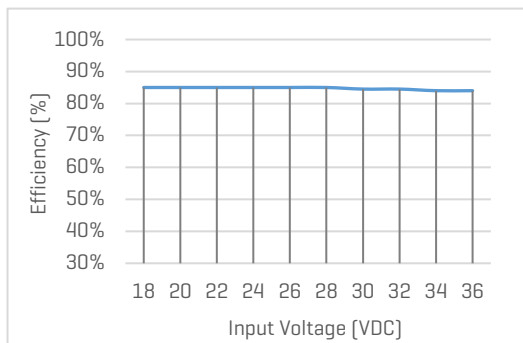


Efficiency vs Load


MV10G-2405, with nominal input voltage

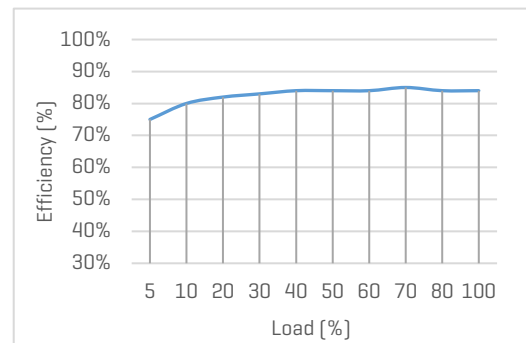

MV10G-0512D, with full Load

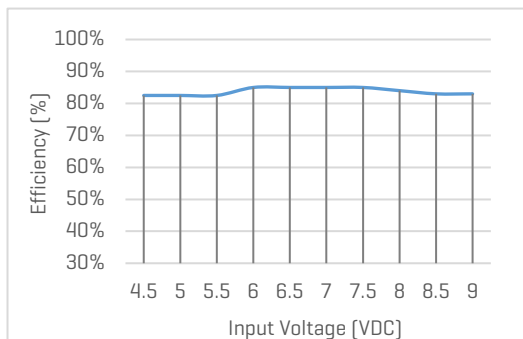


MV10G-0512D, with nominal input voltage

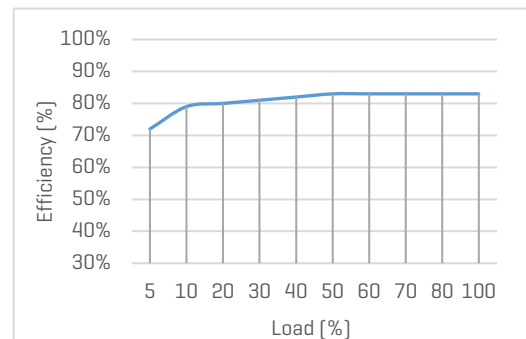

Recommended Application Circuit

Typical Application Circuit

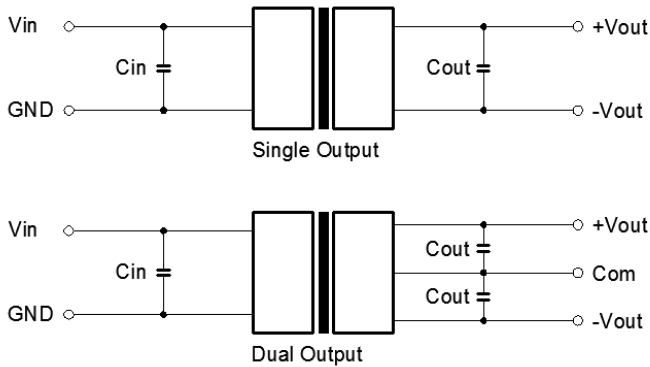

Note

*Typical application circuit is to further lower the input and output ripple. It is not required for general use.

*Recommended component specifications are typical values. Excessive external capacitive load may cause startup problem.

Figure 1. Typical external circuit

[Table 1] Recommended component spec

C_{IN}	100uF
C_{OUT}	10uF

EMC Enhancement for EN55032 Class B

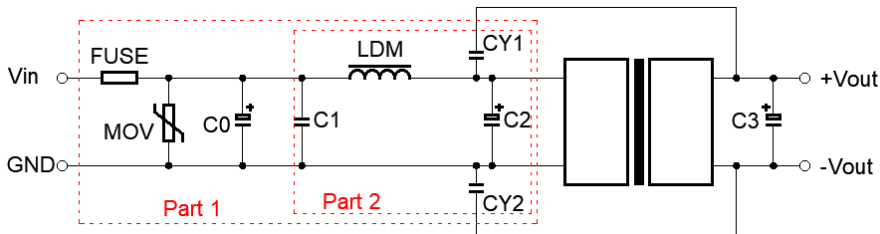


Figure 2. Circuit for EMC enhancement




[Table 2] Recommended component spec

Item	LDM	MOV	C0, C2	C1	CY1, CY2
Spec	4.7uH	S20K30	330uF, 100V	1uF, 100V	1nF, 2KV

* Fuse to be selected according to application needs.

* C3 refer to relative C_{OUT} values in Table 1.

Mechanical Specifications

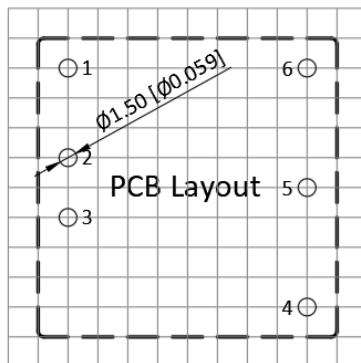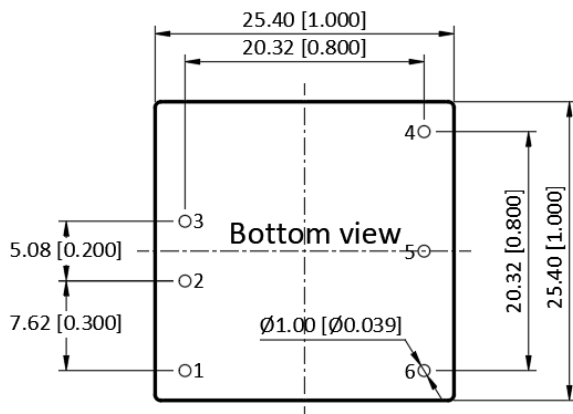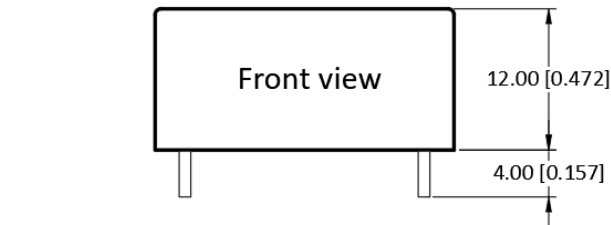

Pin Definition

Pin #	Single Out	Dual Out
1	Ctrl	Ctrl
2	GND	GND
3	V _{IN}	V _{IN}
4	+V _{OUT}	+V _{OUT}
5	No Pin	0V
6	0V	-V _{OUT}

* Unless otherwise specified unit: mm [inch]

* General tolerance: ± 0.50 [± 0.020]

* Pin thickness: ± 0.10 [± 0.004]

* Footprint grid 2.54 x 2.54 mm

FAVOTEK LIMITED

#17 Canton Road, Tsim Sha Tsui, Kowloon, Hong Kong
 Tel: +852 8191 6662
 Eml: info@favotek.com

Favotek reserves the right to make changes to the product at any time without notice. Information provided by Favotek is believed to be accurate and reliable. However, no responsibility is assumed by Favotek for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Want to know more?

For sales, technical support or additional information please get in touch with our team of experts.

ADDITIONAL SERVICES

We provide an end-to-end service

From the initial consultation and sourcing unique components to supplying bespoke solutions including a full design and build process.

Bespoke services

Customised and curated technology solutions across the full range of Conexa Tech products

Sourcing

A full suite of electronics, cable, and mechanical sourcing capabilities

Design & Build

Development and manufacturing services

hello@conexotech.com | +44 118 402 3430

CONEXATECH.COM