

FEATURES

- Medical Approvals
- 3-prong IEC 320-C14, Class I
- Medical safety approved (2x MOPP between primary to secondary)
Suitable for BF application with appropriate system consideration.
- Altitude during operation: Medical up to 5000m.
- $\leq 0.15W$ No Load Input Power
- Touch current less than 100uA
- Meet IEC60601-1-2 Ed4:2014
- 3 year warranty



ELECTRICAL SPECIFICATIONS

- Input range : 90 - 264VAC
- Frequency : 47 - 63Hz
- Power Factor : > 0.95 @115VAC; > 0.90 @230VAC @full load
- Inrush current : $< 50A$ peak @115VAC; $< 100A$ peak @230VAC cold start @25°C
- Input current (rms) : 2.5A @115VAC; 1.3A @230VAC max.
- Efficiency : $> 89%$ (Average) 25 %, 50 %, 75 % and 100 % of full load @ 115/230VAC
- Touch current $< 100uA$ @264VAC
- Maximum output power (Po) : 140 Watts convection cooling
- Hold-up time : $> 20ms$ typical @full load, 115VAC
- Short circuit protection : Auto-recovery
- Over load protection : 110% to 150% maximum power, Auto-recovery
- Over voltage protection : Shutdown and latch off, AC recycle

RoHS Compliant

Dimension : L170 x W64.8 x H38.5mm (6.69"x2.55"x1.52")

Weight : 0.61 kgs. (1.34 lbs.)

SAFETY STANDARDS

UL/cUL 60601-1 3.1rd Edition

TUV EN60601-1 3.1rd Edition

CB IEC60601-1 3.1rd Edition

EMC STANDARDS

EN60601-1-2 Ed4:2015

IEC60601-1-2 Ed4:2014

EN 55011 Class B

FCC Part 18 Class B

CE

ENVIRONMENTAL

- Operating temperature : -20 to +60°C (Refer to "Derating Curve")
- Cooling: Convection-cooling
- Storage temperature: -20°C to +85°C
- Humidity: Non-condensing 0% to 95%
- MTBF : $> 120,000$ hours @full load and 25°C ambient temperature based on MIL-HDBK-217F

DC OUTPUT & FEATURES

Model No.	Output Rating		Po	Output Regulation	Ripple & Noise (Vp-p)	DOE Efficiency	EU ErP
PW-M130A2-1Y120G	+12V	10.84A	130W	$\pm 5%$	120mV	Level VI	Tier 2
PW-M130A2-1Y150G	+15V	8.67A	130W	$\pm 5%$	150mV	Level VI	Tier 2
PW-M140A2-1Y190G	+19V	7.37A	140W	$\pm 5%$	190mV	Level VI	Tier 2
PW-M140A2-1Y240G	+24V	5.84A	140W	$\pm 3%$	240mV	Level VI	Tier 2
PW-M140A2-1Y280G	+28V	5.00A	140W	$\pm 3%$	280mV	Level VI	Tier 2
PW-M140A2-1Y360G	+36V	3.89A	140W	$\pm 3%$	280mV	Level VI	Tier 2
PW-M140A2-1Y480G	+48V	2.92A	140W	$\pm 3%$	280mV	Level VI	Tier 2
PW-M140A2-1Y540G	+54V	2.60A	140W	$\pm 3%$	280mV	Level VI	Tier 2

Note:

1. Ripple and noise are measured at oscilloscope 20MHz bandwidth by a 10uF electrolytic capacitor and a 0.1uF ceramic capacitor in parallel at output connector.



POWER-WIN TECHNOLOGY CORP.

5F-6, No. 79, Sec. 1, Hsin-Tai 5th Road, Shi-Chi, New Taipei City, 22101 Taiwan, R.O.C.


Tel : 886-2-26983989(Rep) Fax : 886-2-26983978

http : //www.power-win.com


E-Mail : sales@power-win.com

REV. 1.0

DERATING CURVE

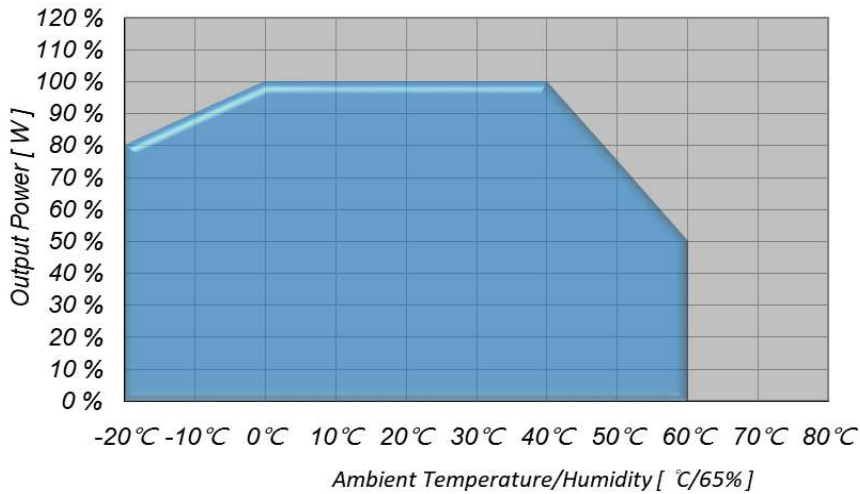

MECHANICAL SPECIFICATION

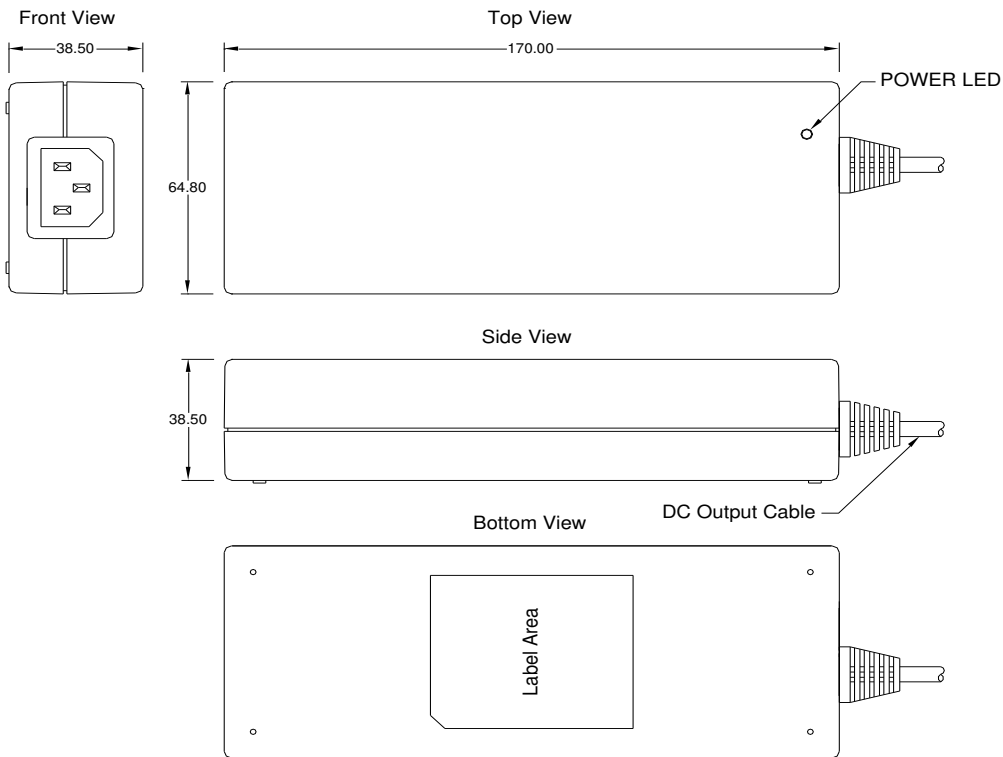

Note:

1. AC Inlet : IEC 320-C14
2. Plastic Case Color : Black
3. Tolerance : ± 0.5mm
4. Unit : mm

STANDARD OUTPUT CABLE

1. AWM 1571 # 14 AWG / 1C + SHIELDING, UL 80°C 30V VW-1, 1050 mm.
2. AWM 1185 # 16 AWG / 1C + SHIELDING, UL 80°C 300V VW-1, 1050 mm.
3. Depends on customers requirements.



POWER-WIN TECHNOLOGY CORP.

5F-6, No. 79, Sec. 1, Hsin-Tai 5th Road, Shi-Chi, New Taipei City, 22101 Taiwan, R.O.C.

Tel : 886-2-26983989(Rep) Fax : 886-2-26983978

http : //www.power-win.com

E-Mail : sales@power-win.com

REV. 1.0

Want to know more?

For sales, technical support or additional information please get in touch with our team of experts.

ADDITIONAL SERVICES

We provide an end-to-end service

From the initial consultation and sourcing unique components to supplying bespoke solutions including a full design and build process.

Bespoke services

Customised and curated technology solutions across the full range of Conexa Tech products

Sourcing

A full suite of electronics, cable, and mechanical sourcing capabilities

Design & Build

Development and manufacturing services

hello@conexotech.com | +44 118 402 3430

CONEXATECH.COM