


Pressure Fiber Optic Feedthrough

Glass Sealed Fiber Optic Feedthrough with Pigtail Interface

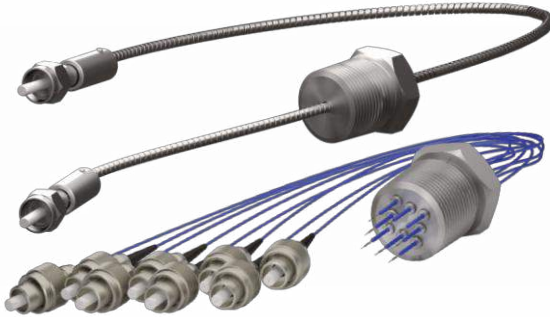


Pressure difference*	Up to 100Mpa (1000bar)
Operating temperature**	-40°C / 200°C
Sealing material	Glass solder
Hermeticity	10 ⁻⁶ to 10 ⁻¹² mbar.l/s
Fiber type	SM fiber (VIS, NIR) MM fiber (UV, VIS, NIR)
Mechanical protection	Stainless steel flexible tubing, 900um PTFE or customized
Flange type	NPT, SAE, DN, etc... customized
Flange material	Stainless steel, other
Channels/fibers	Up to several single fibers within flange. Sealing of fiber groups on request.
Connectors (stainless steel)	FC/PC, FC/APC, ST/PC, SMA 905, MIL-DTL-38999, other

*Depends on overall configuration ** Depends on fiber type

Fiber Optic feedthroughs with hermetically sealed optical fibers within metal flange for use in various branches of industry, in military applications, oil and gas appl. etc. Custom made solutions with respect to the mechanical and optical performance for own feedthrough and a variety of solutions in terms of operating temperatures, pressure differences, thicknesses and resistance to various liquids, gases etc.

Options to seal the several single fibers or groups of fibers within a required flange offering special feedthroughs with high quantity of transmission channels.

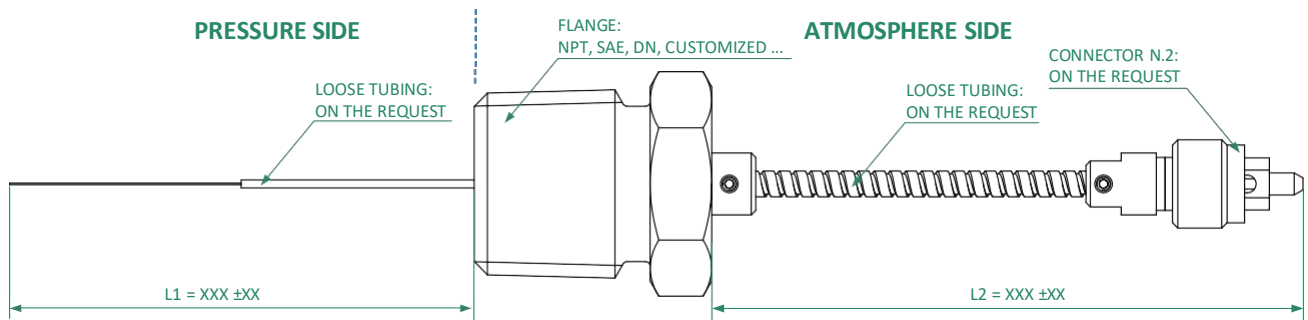

Several variants of Pressure Feedthroughs (many other configurations are possible):

<p>NPT 1/2; 2 CH</p> <p>FC/APC; 3mm/3mm</p>	<p>NPT 1/2; 1 CH</p> <p>FC/APC; PTFE/3mm</p>	<p>PN Flange; 2CH</p> <p>FC/APC; 3mm/3mm</p>
<p>NPT 1/2; 4 CH</p> <p>ST/PC - LC/PC; PTFE/PTFE</p>	<p>SAE DN13; 2CH</p> <p>FC/APC; 3mm/3mm</p>	<p>1-1/4" NPT; 8CH</p> <p>FC/APC; PTFE/bare fiber</p>

Among other things we offer: Adapter and Pigtailed Feedthrough for vacuum, Vacuum compatible cables, etc..

NPT flange, ST Connectors, Steel Jacket



NPT flange - Customer solution



NPT flange FC/PC - Customer Solution

