

# ME1D Series

1W, Unregulated Single or Dual Output, 1.5KV Isolation, DIP14 Package DC/DC

## Features

- ▶ Rated power: 1W Max
- ▶ Input voltage range  $\pm 10\%$
- ▶ Unregulated single or dual output
- ▶ High efficiency, up to 89%
- ▶ Small no load input current
- ▶ Isolation voltage 1.5KVDC
- ▶ Operating temperature range:  $-40 \sim +105^{\circ}\text{C}$  ambient
- ▶ RoHS compliant
- ▶ Standard DIP14 package
- ▶ Continuous short circuit protection
- ▶ Designed to meet UL/EN/IEC 62368-1
- ▶ 3 year warranty



## Overview

The ME1D series are DIP14 package DC/DC converters with unregulated single or dual output, and 1.5KVDC isolation. These converters feature high efficiency, low ripple and noise, continuous short circuit protection, and wide operating temperature range. They are widely used in distributed power system in industrial applications where isolation and voltage converting is needed.

## Model Numbers

Model Number	Input Voltage [VDC] $\pm 10\%$	Output Voltage [VDC]	Output Current [mA]		Efficiency [%] Typ.	Capacitive Load [ $\mu\text{F}$ ] Max.
			Max.	Min.		
ME1D-0303	3.3	3.3	303	30	82	4000
ME1D-0305	3.3	5	200	20	83	4000
ME1D-0309	3.3	9	111	11	84	2000
ME1D-0312	3.3	12	84	8	85	1000
ME1D-0503	5	3.3	303	30	83	4000
ME1D-0505	5	5	200	20	86	4000
ME1D-0509	5	9	111	12	86	2000
ME1D-0512	5	12	84	9	88	1000
ME1D-0515	5	15	67	7	88	680
ME1D-0524	5	24	42	4	89	560
ME1D-1203	12	3.3	303	30	84	4000
ME1D-1205	12	5	200	20	86	4000
ME1D-1209	12	9	111	12	87	2000
ME1D-1212	12	12	84	9	87	1000
ME1D-1215	12	15	67	7	88	680
ME1D-1224	12	24	42	4	89	560

1W, Unregulated Single or Dual Output, 1.5KV Isolation, DIP14 Package DC/DC

## Model Numbers [continued]

Model Number	Input Voltage [VDC] $\pm 10\%$	Output Voltage [VDC]	Output Current [mA]		Efficiency [%] Typ.	Capacitive Load [ $\mu$ F] Max.
ME1D-1505	15	5	200	20	86	4000
ME1D-1509	15	9	111	12	87	2000
ME1D-1512	15	12	84	9	87	1000
ME1D-1515	15	15	67	7	88	680
ME1D-2403	24	3.3	303	30	84	4000
ME1D-2405	24	5	200	20	87	4000
ME1D-2409	24	9	111	12	88	2000
ME1D-2412	24	12	84	9	88	1000
ME1D-2415	24	15	67	7	88	680
ME1D-2424	24	24	42	4	89	560
ME1D-0505D	5	$\pm 5$	$\pm 100$	$\pm 10$	86	2000
ME1D-0509D	5	$\pm 9$	$\pm 56$	$\pm 6$	86	1000
ME1D-0512D	5	$\pm 12$	$\pm 42$	$\pm 5$	88	560
ME1D-0515D	5	$\pm 15$	$\pm 34$	$\pm 4$	88	220
ME1D-1203D	12	$\pm 3.3$	$\pm 152$	$\pm 15$	84	2000
ME1D-1205D	12	$\pm 5$	$\pm 100$	$\pm 10$	86	2000
ME1D-1209D	12	$\pm 9$	$\pm 56$	$\pm 6$	87	1000
ME1D-1212D	12	$\pm 12$	$\pm 42$	$\pm 5$	87	560
ME1D-1215D	12	$\pm 15$	$\pm 34$	$\pm 4$	88	220
ME1D-1505D	15	$\pm 5$	$\pm 100$	$\pm 10$	86	2000
ME1D-1512D	15	$\pm 12$	$\pm 42$	$\pm 5$	87	560
ME1D-1515D	15	$\pm 15$	$\pm 34$	$\pm 4$	88	220
ME1D-2405D	24	$\pm 5$	$\pm 100$	$\pm 10$	87	2000
ME1D-2409D	24	$\pm 9$	$\pm 56$	$\pm 6$	88	1000
ME1D-2412D	24	$\pm 12$	$\pm 42$	$\pm 5$	88	560
ME1D-2415D	24	$\pm 15$	$\pm 34$	$\pm 4$	88	220

\* Only typical models are listed. Other models may be available upon request.

\* For dual output models, max capacitive load stipulated in the above list is for each output.

\* See MEK1D series for 3KVDC isolation models.

1W, Unregulated Single or Dual Output, 1.5KV Isolation, DIP14 Package DC/DC

## Electrical Specifications

Unless otherwise indicated, specifications are measured at  $T_A=25^{\circ}\text{C}$ , nominal input voltage, full load after warm up.

Parameters	Conditions	Min.	Typ.	Max.	Unit	Note
Input current Full load	$V_{IN}=3.3\text{V}$		370			
	$V_{IN}=5\text{V}$		230			
	$V_{IN}=12\text{V}$	-	99	-	mA	
	$V_{IN}=15\text{V}$		78			
	$V_{IN}=24\text{V}$		51			
Input current	No load	-	3	15	mA	
Reflected ripple current		-	15	-	mA	
Surge voltage 1 second max	$V_{IN}=3.3\text{V}$	-0.7		5		
	$V_{IN}=5\text{V}$	-0.7		9		
	$V_{IN}=12\text{V}$	-0.7	-	18	VDC	
	$V_{IN}=15\text{V}$	-0.7		21		
	$V_{IN}=24\text{V}$	-0.7		30		
Output voltage accuracy		Refer to graphic in "Characteristic Curves" section				
Line regulation For $V_{IN}$ change of $\pm 1\%$	$V_{OUT}=3.3\text{V}$	-	$\pm 1.5$	-	%	
	Other Output		$\pm 1.2$			
Load regulation $I_{OUT}=10\%$ to $100\%$ of $I_{OUT, rated}$	$V_{OUT}=3.3\text{V}$		10			
	$V_{OUT}=5\text{V}$		8			
	$V_{OUT}=9\text{V}$		8			
	$V_{OUT}=12\text{V}$	-	7	-	%	
	$V_{OUT}=15\text{V}$		6			
	$V_{OUT}=24\text{V}$		6			
Output ripple and noise	20MHz bandwidth	-	45	100	mVp-p	
Temperature coefficient	Full load	-	$\pm 0.03$	-	$\%/^{\circ}\text{C}$	
Output short circuit protection		Continuous, automatic recovery				
Input filter		Capacitor				
Hot plug		None				

\* Operating with less than 10% of rated load will not cause permanent damage to the converters, but the performances data may not fall into the specifications, and reliable operating is not assured.

\* Dual output models need to operate with balanced load. The load difference between two outputs over 10% may cause unstable operating of the converter.

1W, Unregulated Single or Dual Output, 1.5KV Isolation, DIP14 Package DC/DC

## General Specifications


Parameters	Conditions	Min.	Typ.	Max.	Unit	Note
<b>Isolation voltage</b> 1 minute, leakage current 1mA max	Input to Output	1500	-	-	VDC	
<b>Isolation resistance</b> Tested at 500VDC	Input to Output	1000	-	-	M ohm	
<b>Isolation capacitance</b> Tested at 100KHz, 0.1V	Input to Output	-	20	-	pF	
<b>Operating temperature</b>	No derating	-40	-	+105	°C	
<b>Storage temperature</b>		-55	-	+125	°C	
<b>Temperature rise at case</b>	Full load	-	25	-	°C	
<b>Storage humidity</b>	Non-condensing	-	-	95	%RH	
<b>Switching frequency</b>	Full load	-	220	-	KHz	
<b>Pin soldering resistance</b> 1.5mm away from case for 10 sec		-	-	300	°C	
<b>Vibration</b>		10-150Hz, 5G, 0.75mm along X, Y and Z				
<b>Case material</b>		Black plastic UL94-V0				
<b>Cooling method</b>		Free air convection				
<b>Design based on standards</b>		UL/EN/IEC 62368-1				
<b>Safety certifications</b>		EN/IEC 62368-1				
<b>EMC</b>	Emissions Immunity	CISPR32, EN55032 Class B* IEC/EN61000-4-2				
<b>MTBF</b>	MIL-HDBK-217F	>3,500,000 Hours, T <sub>A</sub> =25°C				
<b>Size</b>		19.5 x 9.8 x 7.9 mm				
<b>Weight</b>		2.4g Typ.				

\*External circuit is required in order to meet Class B, refer to Figure 2 in Recommended External Circuit


## Characteristic Curves

### Derating Curve

Output vs Ambient Temperature

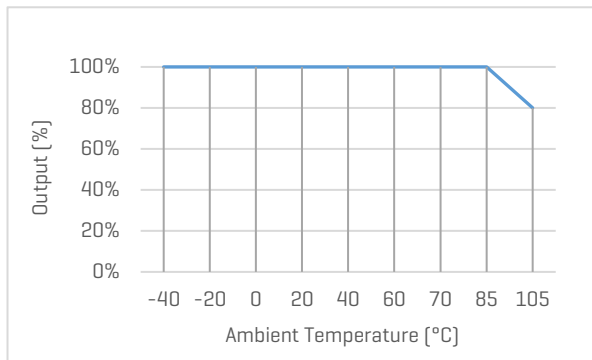


Output Voltage Accuracy vs Load

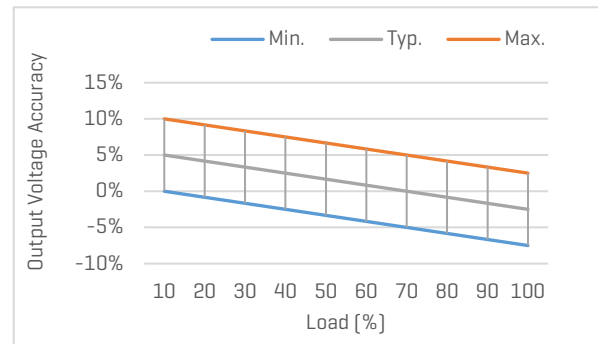

### Efficiency Curves


Efficiency vs Input Voltage

ME1D-1205, with full Load

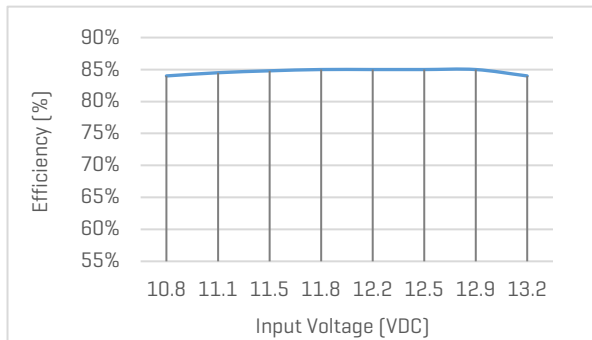


Efficiency vs Load

ME1D-1205, with nominal input voltage

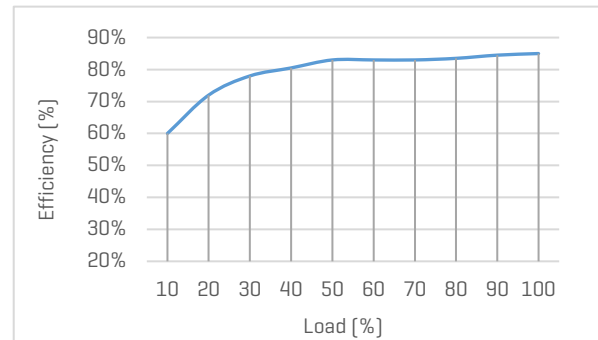


Efficiency vs Input Voltage

ME1D-0505D, with full Load

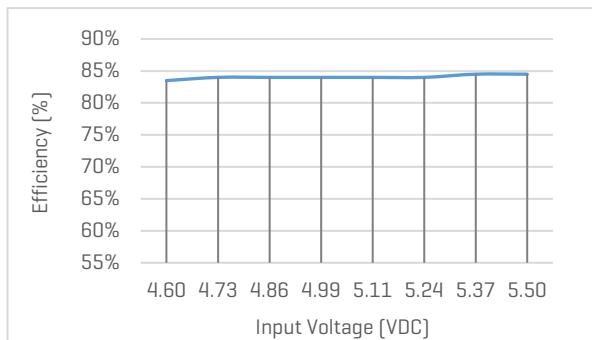


Efficiency vs Load

ME1D-0505D, with nominal input voltage

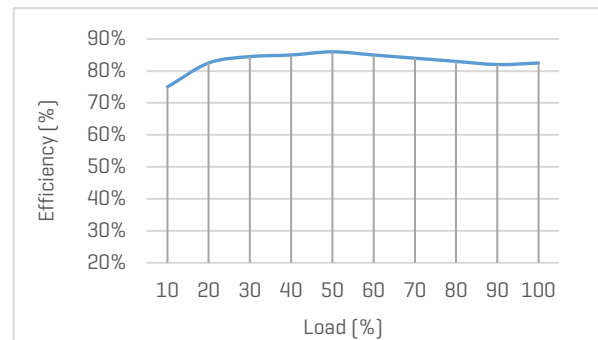

## Recommended External Circuit

### Typical Application Circuit

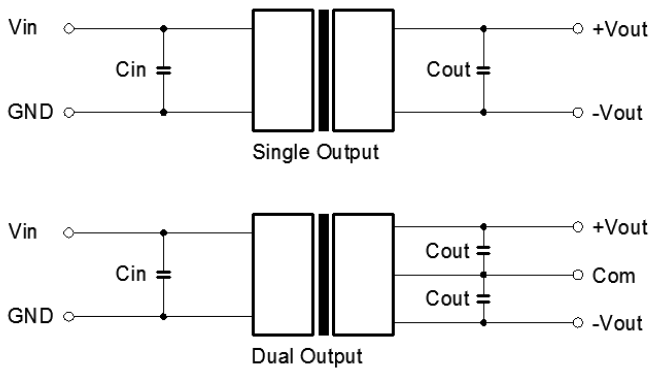

**Note**

\*Typical application circuit is to further lower the input and output ripple. It is not required for general use.

\*Recommended component specifications are typical values. Excessive external capacitive load may cause startup problem.

Figure 1. Typical external circuit

[Table 1] Recommended component spec

Input voltage	3.3, 5V	12V	15V	24V
$C_{IN}$	4.7uF, 16V	2.2uF, 25V	2.2uF, 25V	1.0uF, 50V

[Table 2] Recommended component spec

Output voltage	3.3, 5V	9V	12V	15V	24V
$C_{OUT}$	10uF, 16V	4.7uF, 16V	2.2uF, 25V	1uF, 25V	0.47uF, 50V

### Circuit for EMC Enhancement

\*Use this application circuit to meet Class B EMC performance.

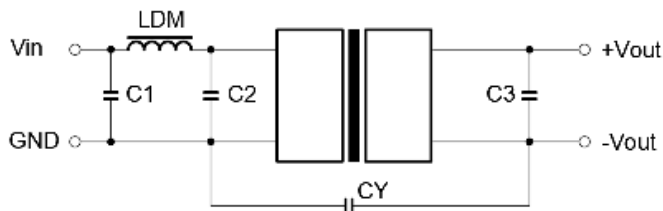





Figure 2. Circuit for EMC enhancement

[Table 3] Recommended component spec

Component	LDM	C1, C2	CY
Spec	6.8uH	4.7uF, 50V	1nF, 2KV

\*C3 refer to  $C_{OUT}$  in [Table 2]

## Mechanical Specifications

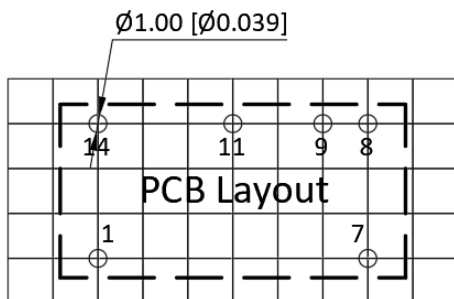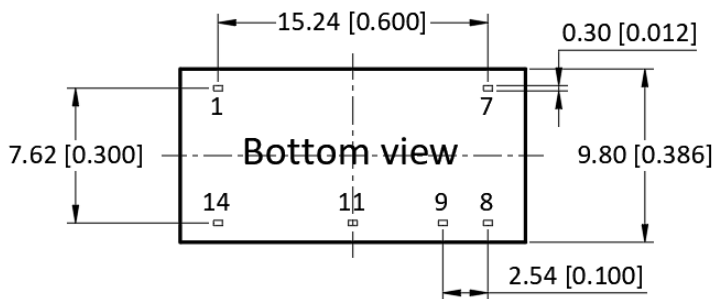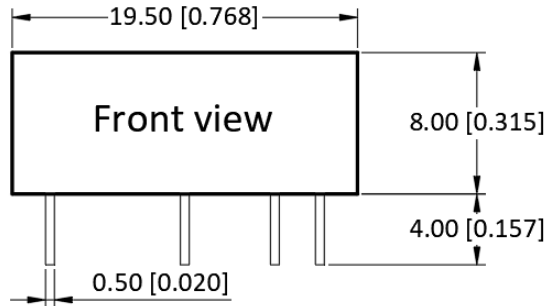

### Pin Definition

Pin #	Single Out	Dual Out
1	GND	GND
7	NC	NC
8	-V <sub>OUT</sub>	0V
9	+V <sub>OUT</sub>	+V <sub>OUT</sub>
11	No Pin	-V <sub>OUT</sub>
14	V <sub>IN</sub>	V <sub>IN</sub>

\* Unless otherwise specified unit: mm [inch]

\* General tolerance: ±0.25 [±0.010]

\* Pin thickness: ±0.10 [±0.004]

\* Footprint grid 2.54 x 2.54 mm

### FAVOTEK LIMITED

#17 Canton Road, Tsim Sha Tsui, Kowloon, Hong Kong  
 Tel: +852 8191 6662  
 Eml: info@favotek.com

Favotek reserves the right to make changes to the product at any time without notice. Information provided by Favotek is believed to be accurate and reliable. However, no responsibility is assumed by Favotek for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

## Want to know more?

For sales, technical support or additional information please get in touch with our team of experts.

### ADDITIONAL SERVICES

## We provide an end-to-end service

From the initial consultation and sourcing unique components to supplying bespoke solutions including a full design and build process.

### Bespoke services

Customised and curated technology solutions across the full range of Conexa Tech products

### Sourcing

A full suite of electronics, cable, and mechanical sourcing capabilities

### Design & Build

Development and manufacturing services

hello@conexotech.com | +44 118 402 3430

CONEXATECH.COM